

**2022
EDITION**



The
Frillo
Series

**PREMIUM ARCHITECTURAL
LIGHTING SOLUTIONS**



MARBUL PLUS

Magnetic track lights have created a revolution in lighting design. Lafit Lighting brings you the minimal and beautifully designed, low voltage multipurpose system with various solutions including spotlights, pendants, and linear lighting. It can be installed both vertically and horizontally and has recessed, surface, and hanging versions. Low voltage offers designers plenty of freedom, as it can illuminate versatile spaces. By adjusting and moving the light points, they can be adopted to changing lighting requirements. The variable and flexible lighting design smartly makes use of your space and creates an exhilarating experience.






MARBUL PLUS


LFTL1124 C

MEGNETIC TRACK LIGHTS

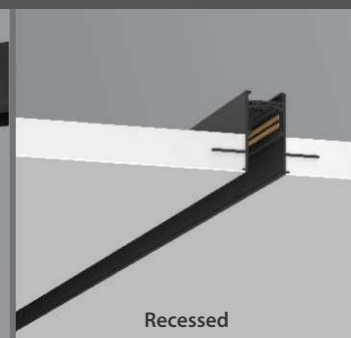

		5W	12W	20W
LUMEN OUTPUT	N 4000K	550	1320	2200
	W 3000K	525	1260	2100
SYSTEM EFFICIENCY	No. of LEDs	1	1	1
	Driver Rating	48V DC	48V DC	48V DC
	UGR Rating	>14	>14	>14
DIMENSIONS (in mm)	Diameter Ø	40	60	80
	Height H	90	121	151
	Adapter L	185	185	185
	Recessed (Trimless)			
Track Size	L	500 / 1000 / 2000		
	W	67		
	H	54		
	Cutout Ø	30		
Surface mounted / Pendant / Recessed				
Track Size	L	500 / 1000 / 2000		
	W	27 (23mm Inner width)		
	H	54		

SYSTEM SPEC	Housing	Aluminum	
	LED Make	Cree	
BEAM ANGLES	Driver Brand	Meanwell (External)	
	5W,12W,20W		
COLOUR OPTIONS			
		Black	
CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

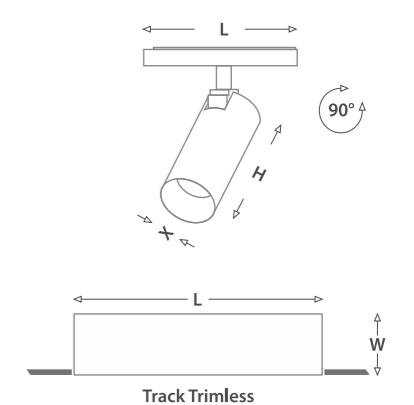




MARBUL PLUS

LFTL1124 D

MEGNETIC TRACK LIGHTS

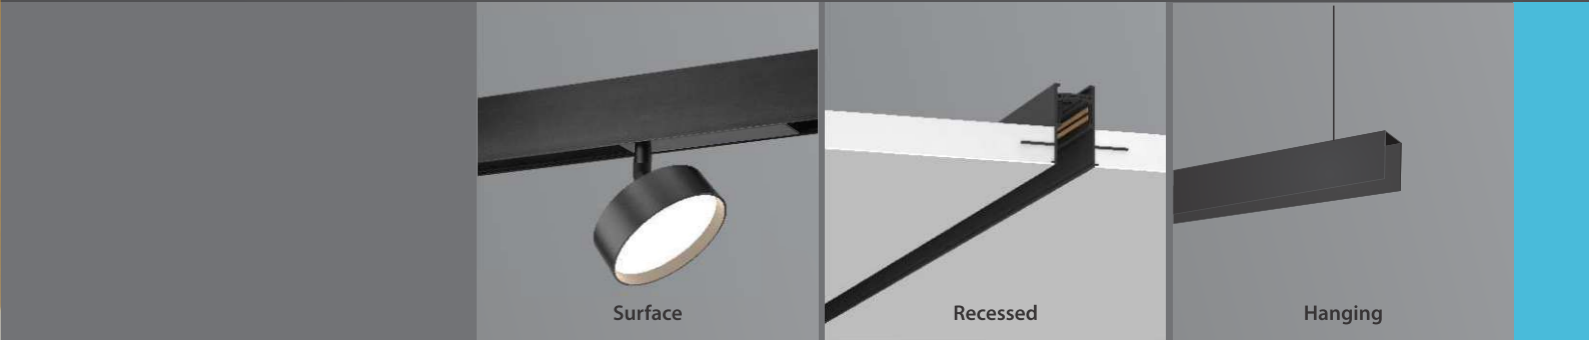

	Wattage (W)	12W
LUMEN OUTPUT	N 4000K	1200
	W 3000K	1080
SYSTEM EFFICIENCY	No. of LEDs	-
	Driver Rating	48V DC
	UGR Rating	>25
DIMENSIONS (in mm)	Diameter Ø	113
	Height H	35
	Adapter L	185

Recessed (Trimless)		
Track Size	L	500 / 1000 / 2000
	W	67
	H	54
Cutout	Ø	30


Surface mounted / Pendant / Recessed		
Track Size	L	500 / 1000 / 2000
	W	27 (23mm Inner width)
	H	54

SYSTEM SPEC	Housing	Aluminum
	LED Make	Edison
	Driver Brand	Meanwell (External)

BEAM ANGLES	12W	
		100°

COLOUR OPTIONS	Black
----------------	-------

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

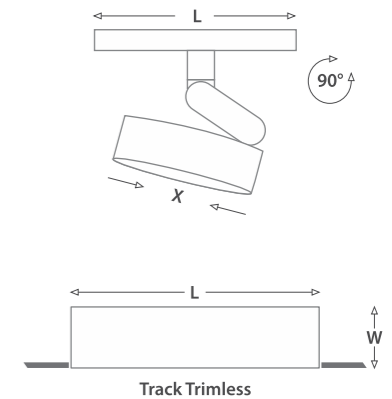






MARBUL PLUS

LFTL1124 E

MEGNETIC TRACK LIGHTS




48 V DC

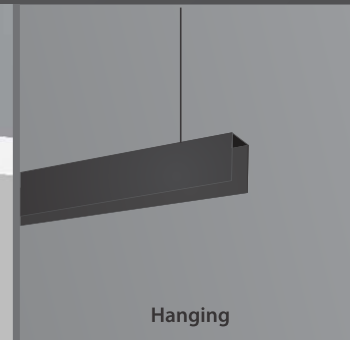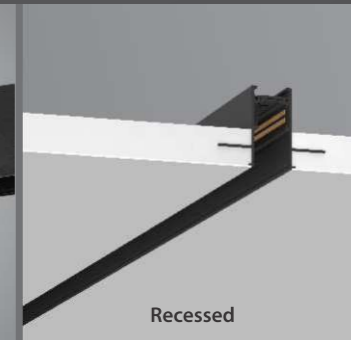

		Wattage (W)	6W	12W	18W
LUMEN OUTPUT	N	4000K	660	1320	1980
	W	3000K	630	1260	1890
SYSTEM EFFICIENCY	No. of LEDs		6	12	18
	Driver Rating		48V DC	48V DC	48V DC
	UGR Rating		>9	>9	>9
DIMENSIONS (in mm)	Size	L	119	233	348
		W	22	22	22
	Height	H	43	43	43
	Recessed (Trimless)				
Cutout	Track Size	L	500 / 1000 / 2000		
		W	67		
		H	54		
		Ø	30		
Surface mounted / Pendant / Recessed					
Track Size	L	500 / 1000 / 2000			
	W	27 (23mm Inner width)			
	H	54			

SYSTEM SPEC	Housing	Aluminum	
	LED Make	Osram	
BEAM ANGLES	Driver Brand	Meanwell (External)	
	6W, 12W, 18W		
COLOUR OPTIONS	30°		
	Black		
CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

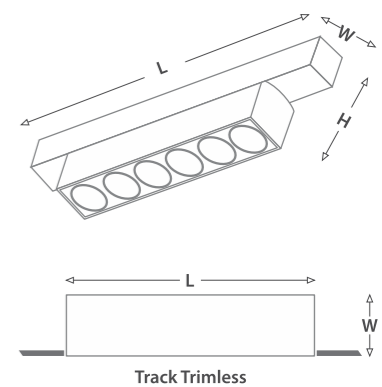




MARBUL PLUS

LFTL1124 F

MEGNETIC TRACK LIGHTS



DIMMABLE
 ANTI-GLARE
 TUNEABLE
 TILTABLE 90°
 48 V DC
 Alexa

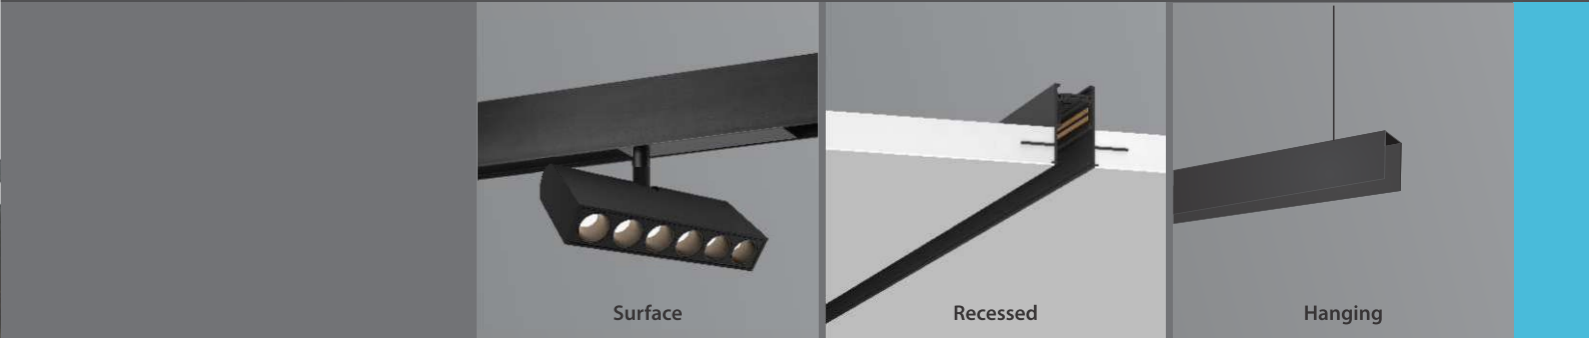

	Wattage (W)	6W	12W
LUMEN OUTPUT	N 4000K	660	1320
	W 3000K	630	1260

SYSTEM EFFICIENCY	No. of LEDs	6	12
	Driver Rating	48V DC	48V DC
	UGR Rating	>9	>9

DIMENSIONS (in mm)	Size	L	119	233
		W	22	22
	Height	H	55	55

Recessed (Trimless)			
Track Size	L	500 / 1000 / 2000	
	W	67	
	H	54	
Cutout	Ø	30	


Surface mounted / Pendant / Recessed			
Track Size	L	500 / 1000 / 2000	
	W	27 (23mm Inner width)	
	H	54	

SYSTEM SPEC	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Meanwell (External)

BEAM ANGLES	6W, 12W, 18W
	30°

COLOUR OPTIONS	Black
----------------	-------

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC


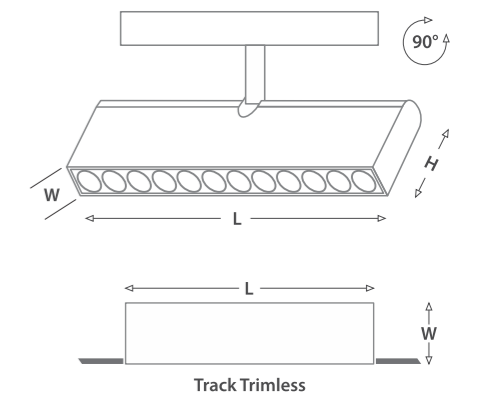




MARBUL PLUS


LFTL1124 G

MEGNETIC TRACK LIGHTS

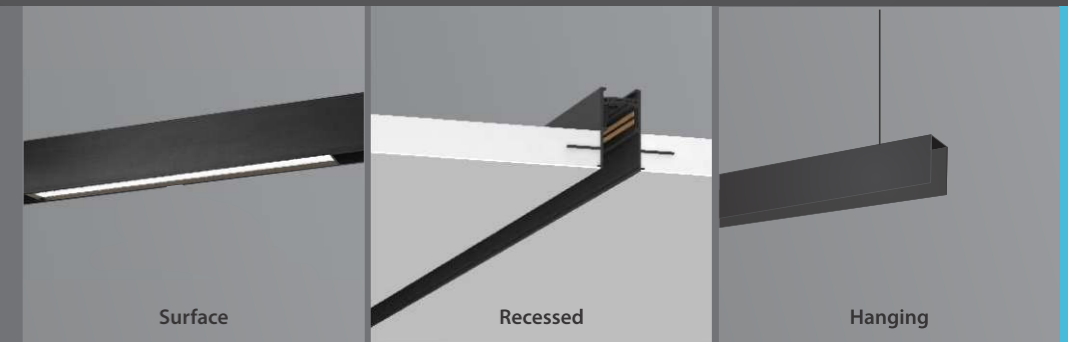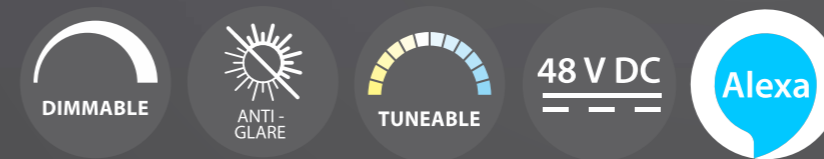

Wattage (W)		7W	15W	22W
LUMEN OUTPUT	N 4000K	700	1500	2200
	W 3000K	630	1350	2090
SYSTEM EFFICIENCY	Driver Rating	48V DC	48V DC	48V DC
	UGR Rating	>25	>25	>25
DIMENSIONS (in mm)	Size	L 233 W 22	H 463 W 22	L 693 W 22
	Height	H 43	H 43	H 43
Recessed (Trimless)				
Track Size	L	500 / 1000 / 2000		
	W	67		
	H	54		
Cutout	Ø	30		
Surface mounted / Pendant / Recessed				
Track Size	L	500 / 1000 / 2000		
	W	27 (23mm Inner width)		
	H	54		

SYSTEM SPEC	Housing	Aluminum	
	LED Make	Edison	
BEAM ANGLES	Driver Brand	Meanwell (External)	
	7W, 15W, 22W		
COLOUR OPTIONS	100°		
	Black		
CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

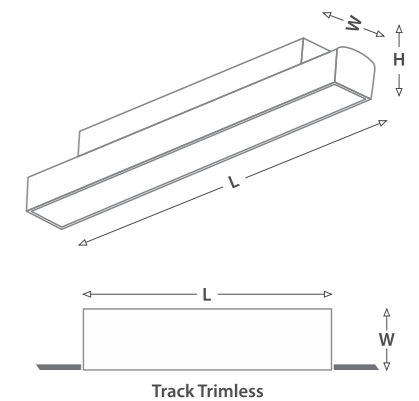




MARBUL PLUS

LFTL1124 H

MEGNETIC TRACK LIGHTS



48 V DC

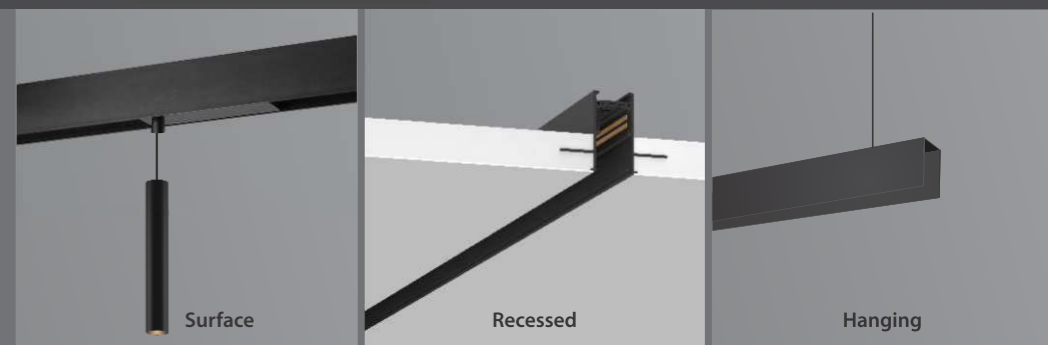

	Wattage (W)	5W	12W
LUMEN OUTPUT	N 4000K	550	1320
	W 3000K	525	1260
SYSTEM EFFICIENCY	No. of LEDs	-	-
	Driver Rating	48V DC	48V DC
	UGR Rating	>14	>14
DIMENSIONS (in mm)	Diameter Ø	40	50
	Height H	300	300
	Adapter L	185	185
	Hanging wire L	1.5m	1.5m

Recessed (Trimless)			
Track Size	L	500 / 1000 / 2000	
	W	67	
	H	54	
Cutout	Ø	30	


Surface mounted / Pendant / Recessed			
Track Size	L	500 / 1000 / 2000	
	W	27 (23mm Inner width)	
	H	54	

SYSTEM SPEC	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES	5W, 12W
	36°

COLOUR OPTIONS
Black


CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

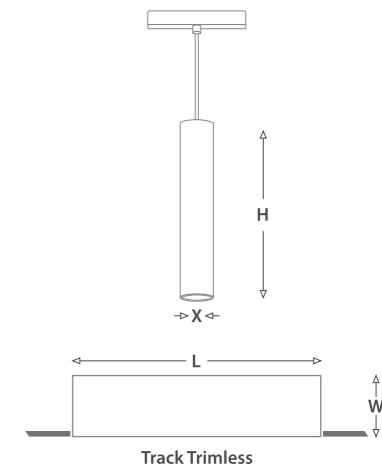

MARBUL PLUS

LFTL1124 I

MEGNETIC TRACK LIGHTS

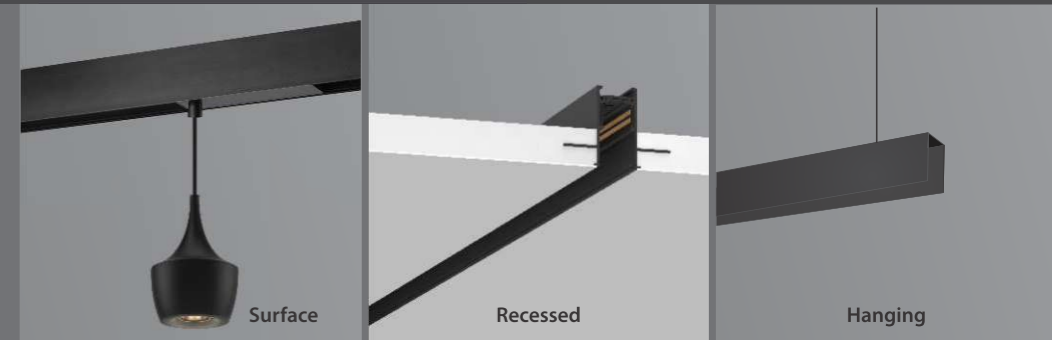

Wattage (W)	5W
LUMEN OUTPUT	N 4000K 550
	W 3000K 525

SYSTEM EFFICIENCY	No. of LEDs	-
	Driver Rating	48V DC
	UGR Rating	>9

DIMENSIONS (in mm)	Diameter Ø	79
	Height H	120
	Adapter L	185
	Hanging wire L	1.5m

Recessed (Trimless)		
Track Size L	500 / 1000 / 2000	
W	67	
H	54	
Cutout Ø	30	


Surface mounted / Pendant / Recessed		
Track Size L	500 / 1000 / 2000	
W	27 (23mm Inner width)	
H	54	

SYSTEM SPEC	Housing	Aluminum
	LED Make	Cree
DRIVER BRAND	Driver Brand	Meanwell (External)



COLOUR OPTIONS
Black

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

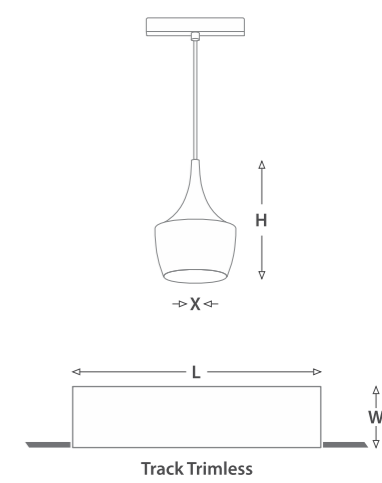





MARBUL PLUS

LFTL1124 J

MEGNETIC TRACK LIGHTS




48 V DC

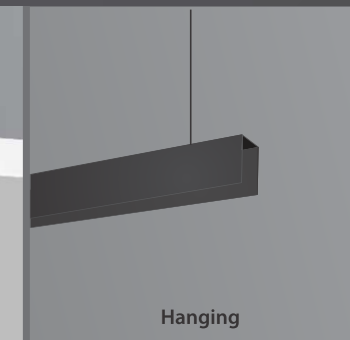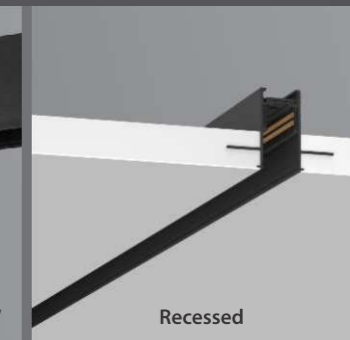

		5W	10W
LUMEN OUTPUT	N 4000K	550	1100
	W 3000K	525	1050
SYSTEM EFFICIENCY	No. of LEDs	-	-
	Driver Rating	48V DC	48V DC
	UGR Rating	>9	>9
DIMENSIONS (in mm)	Diameter Ø	50	50
	Height H	73	73
	Adapter L	185	185
	Recessed (Trimless)		
Track Size	L	500 / 1000 / 2000	
	W	67	
	H	54	
	Cutout Ø	30	
Surface mounted / Pendant / Recessed			
Track Size	L	500 / 1000 / 2000	
	W	27 (23mm Inner width)	
	H	54	
	Colour Options		
Black			

SYSTEM SPEC	Housing	Aluminum	
	LED Make	Cree	
BEAM ANGLES	Driver Brand	Meanwell (External)	
	5W, 10W		
COLOUR OPTIONS	36°		
	Black		
CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

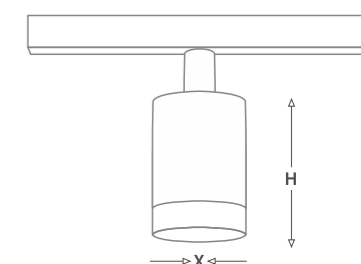




MARBUL PLUS

LFTL1124 K


MEGNETIC TRACK LIGHTS

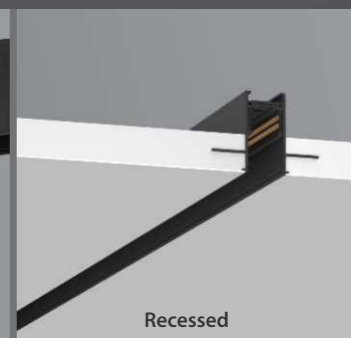

	Wattage (W)	6W	3W
LUMEN OUTPUT	N 4000K	600	300
	W 3000K	570	285
SYSTEM EFFICIENCY	No. of LEDs	-	-
	Driver Rating	48V DC	48V DC
	UGR Rating	>25	>25
DIMENSIONS (in mm)	Diameter Ø	60	60
	Height	108	108
	Adapter L	185	185

Recessed (Trimless)			
Track Size	L	500 / 1000 / 2000	
	W	67	
	H	54	
Cutout	Ø	30	
Surface mounted / Pendant / Recessed			
Track Size	L	500 / 1000 / 2000	
	W	27 (23mm Inner width)	
	H	54	

SYSTEM SPEC	Housing	Aluminum	
	LED Make	Cree	
BEAM ANGLES	Driver Brand	Meanwell (External)	
	6W,3W		
COLOUR OPTIONS	100°		
	Black	White	
CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

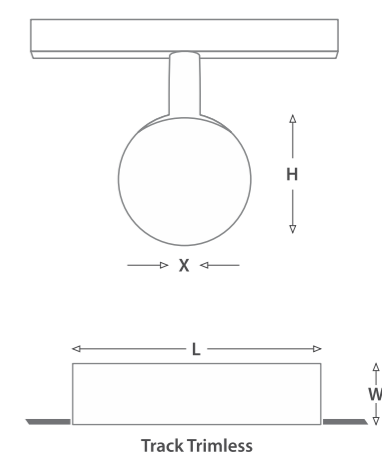



MARBUL PLUS

LFTL1124 L

MEGNETIC TRACK LIGHTS



48 V DC

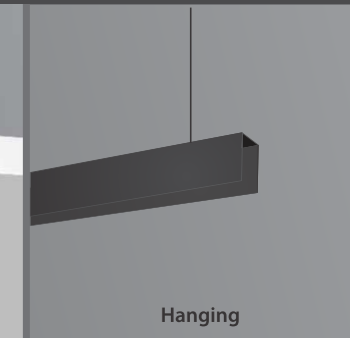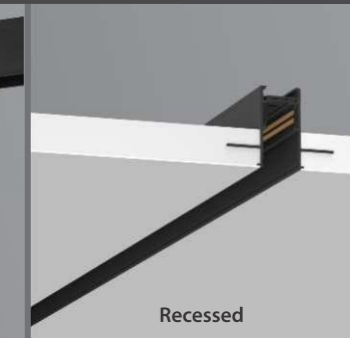

Wattage (W)	8W	
LUMEN OUTPUT	N 4000K	800
	W 3000K	760
SYSTEM EFFICIENCY	No. of LEDs	-
	Driver Rating	48V DC
	UGR Rating	>9 >9
DIMENSIONS (in mm)	Diameter Ø	100 100
	Height H	97 97
	Adapter L	185 185
	Hanging wire L	1.5m 1.5m

Recessed (Trimless)		
Track Size L	500 / 1000 / 2000	
W	67	
H	54	
Cutout Ø	30	


Surface mounted / Pendant / Recessed		
Track Size L	500 / 1000 / 2000	
W	27 (23mm Inner width)	
H	54	

SYSTEM SPEC	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES	8W
	36°

COLOUR OPTIONS	Black
	Champagne Gold

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

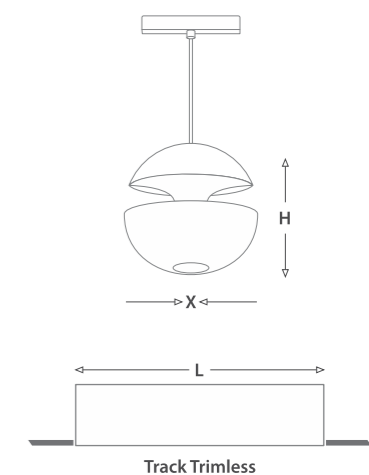




MARBUL PLUS

LFTL1124 M

MEGNETIC TRACK LIGHTS




48 V DC

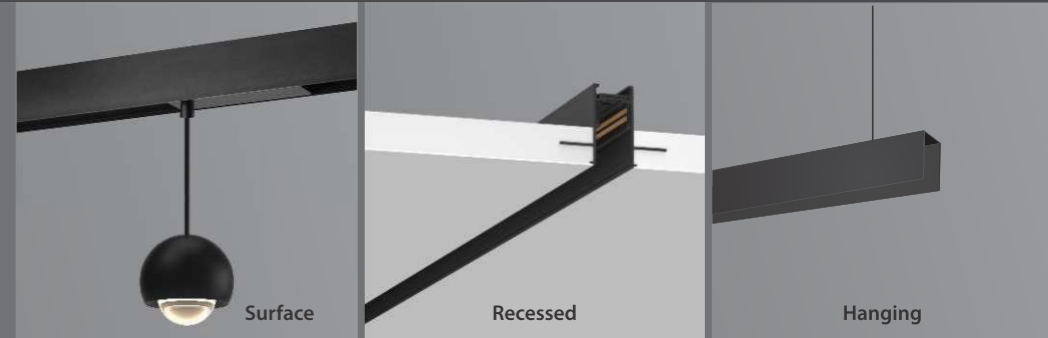

	Wattage (W)	8W
LUMEN OUTPUT	N 4000K	800
	W 3000K	760
SYSTEM EFFICIENCY	No. of LEDs	-
	Driver Rating	48V DC
	UGR Rating	>11
DIMENSIONS (in mm)	Diameter Ø	85
	Height H	76
	Adapter L	115
	Hanging wire L	1.5m

Recessed (Trimless)		
Track Size	L	500 / 1000 / 2000
	W	67
	H	54
Cutout	Ø	30
Surface mounted / Pendant / Recessed		
Track Size	L	500 / 1000 / 2000
	W	27 (23mm Inner width)
	H	54

SYSTEM SPEC	Housing	Aluminum
	LED Make	Cree
BEAM ANGLES	Driver Brand	Meanwell (External)
	8W	
COLOUR OPTIONS	40°	
	Black	
CRI	>80	
TEMP	0-45°	
IP RATING	IP-20	
INPUT	48VDC	

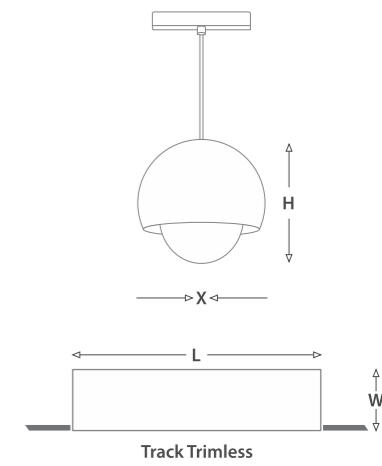




ANGEL PLUS

A collection of minimalist and elegant design lighting products for all your lighting needs. Angel Plus creates a graceful and exquisite lighting atmosphere that is both unique and expressive, particularly when illuminated, the interior colours contrast with the exterior finish to reveal all their beauty. Also available in Trimless design, its sleek, invisible and merges with the ceiling making the room appear bigger and spacious. Angel Plus range is suitable for planning solutions for high-end residences, and retail outlets, lobbies, hotels, museums, and wherever representative, stylish premium lighting solutions technology is required.



LAFIT

Magnetic Series

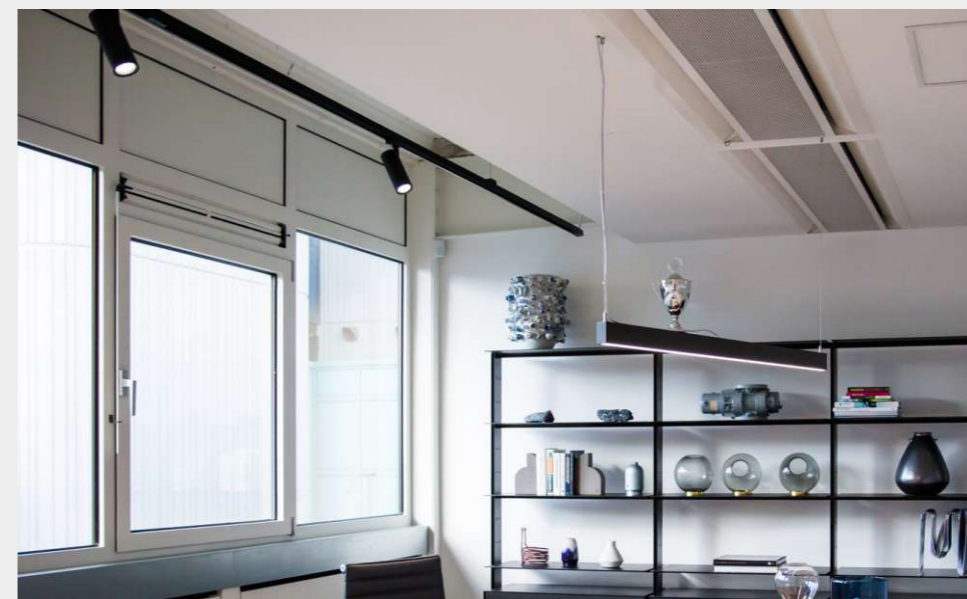

MARBUL PLUS






LFTL1124 D

MEGNETIC TRACK LIGHTS

MARBUL PLUS


LFTL1124 E

MEGNETIC TRACK LIGHTS

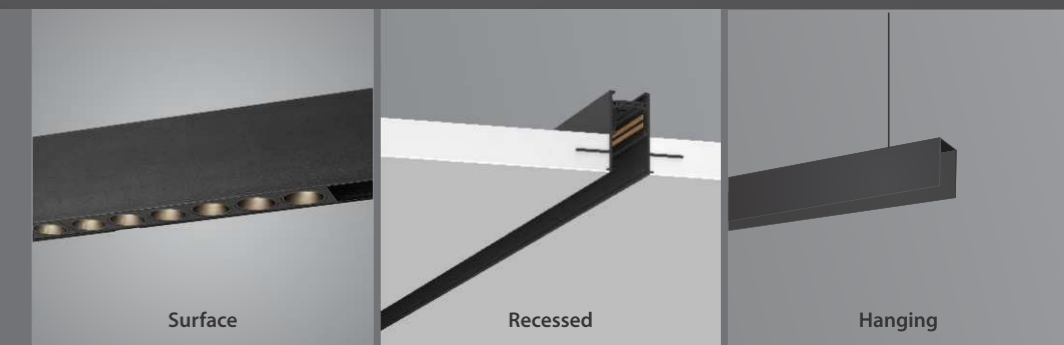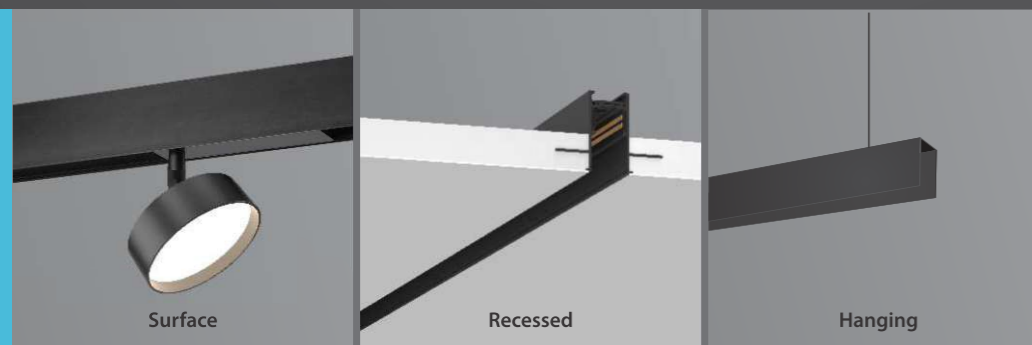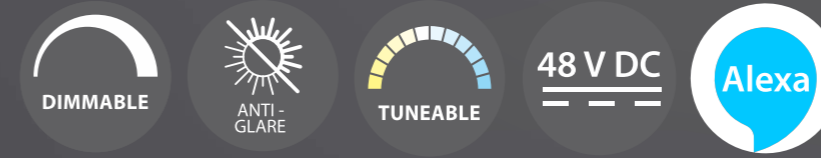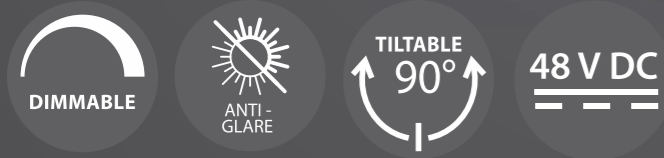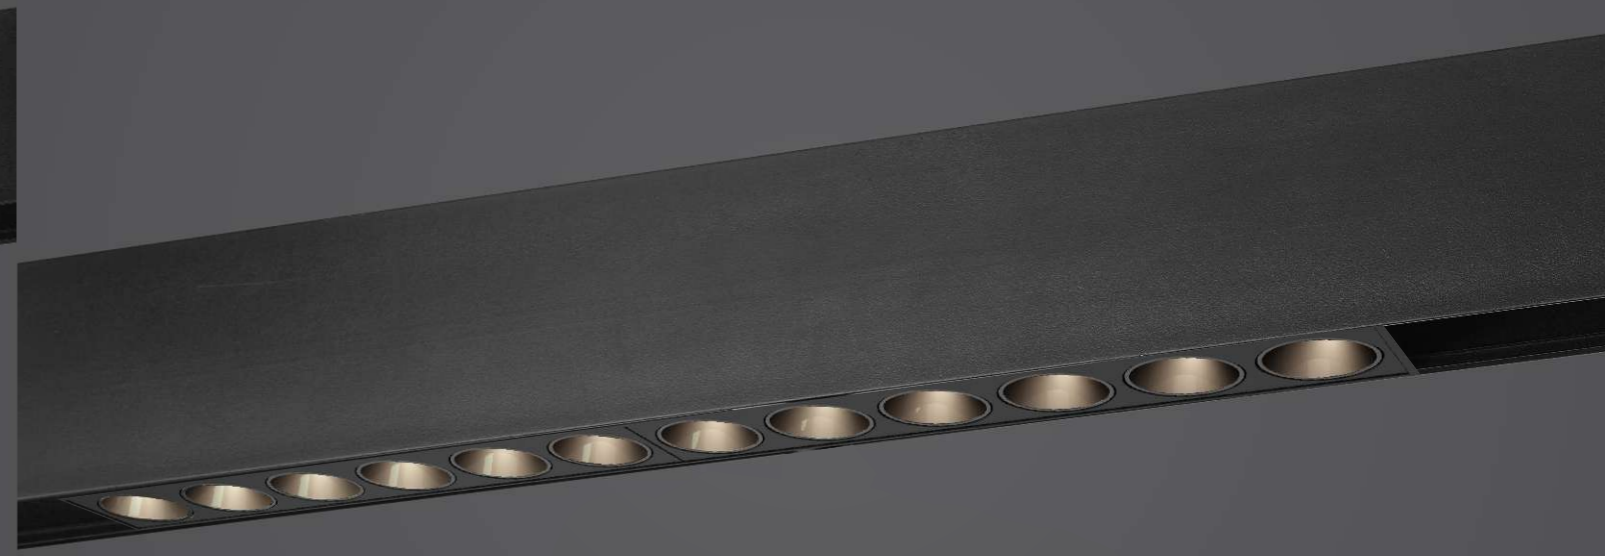


Wattage (W)		12W
LUMEN OUTPUT	N 4000K	1200
	W 3000K	1080
SYSTEM EFFICIENCY	No. of LEDs	-
	Driver Rating	48V DC
UGR Rating		>25
DIMENSIONS (in mm)	Diameter Ø	113
	Height H	35
	Adapter L	185
Recessed (Trimless)		
Track Size	L	500 / 1000 / 2000
	W	67
	H	54
	Ø	30
Surface mounted / Pendant / Recessed		
Track Size	L	500 / 1000 / 2000
	W	27 (23mm Inner width)
	H	54

SYSTEM SPEC	Housing	Aluminum	
	LED Make	Edison	
Driver Brand		Meanwell (External)	
BEAM ANGLES	12W	100°	
	COLOUR OPTIONS		Black
CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

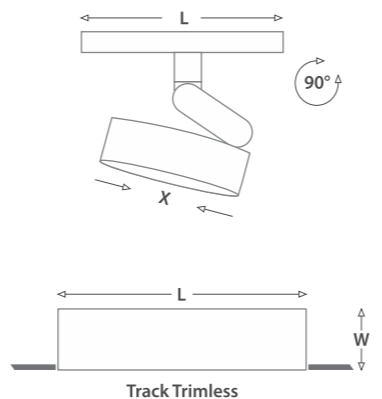

Wattage (W)		6W	12W	18W
LUMEN OUTPUT	N 4000K	660	1320	1980
	W 3000K	630	1260	1890
SYSTEM EFFICIENCY	No. of LEDs	6	12	18
	Driver Rating	48V DC	48V DC	48V DC
UGR Rating		>9	>9	>9
DIMENSIONS (in mm)	Size L	119	233	348
	W	22	22	22
	Height H	43	43	43
Recessed (Trimless)				
Track Size	L	500 / 1000 / 2000		
	W	67		
	H	54		
	Ø	30		
Surface mounted / Pendant / Recessed				
Track Size	L	500 / 1000 / 2000		
	W	27 (23mm Inner width)		
	H	54		

SYSTEM SPEC	Housing	Aluminum	
	LED Make	Osram	
Driver Brand		Meanwell (External)	
BEAM ANGLES	6W, 12W, 18W	30°	
	COLOUR OPTIONS		Black
CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

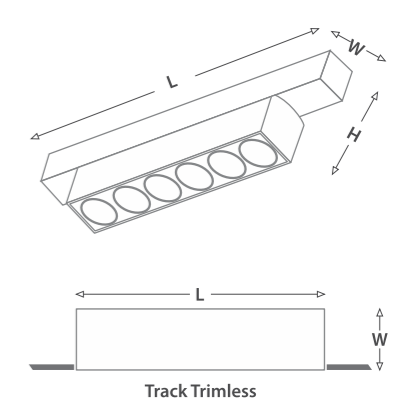

MARBUL PLUS






LFTL1124 F

MEGNETIC TRACK LIGHTS

MARBUL PLUS


LFTL1124 G

MEGNETIC TRACK LIGHTS

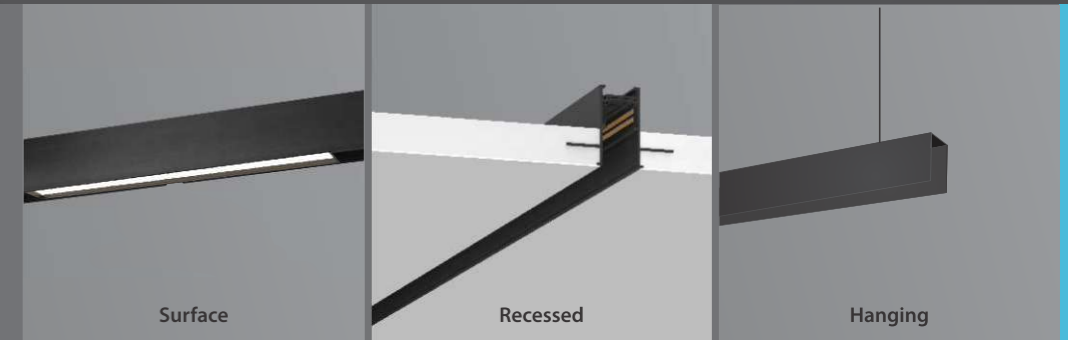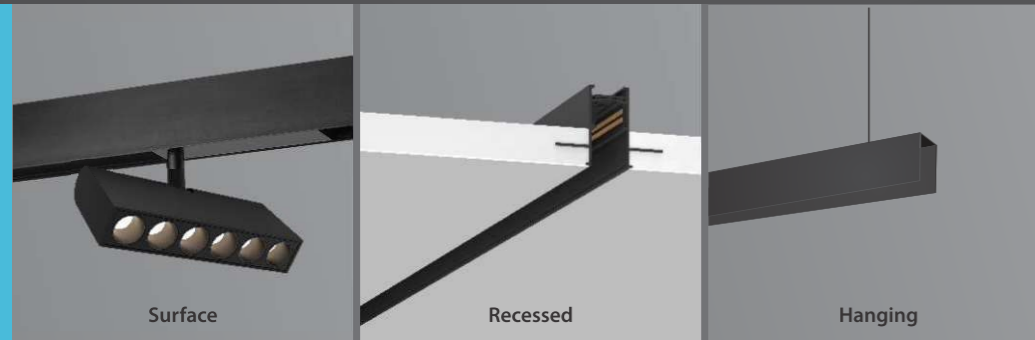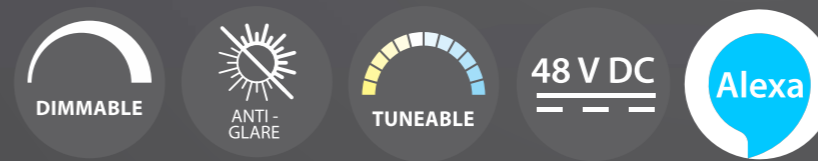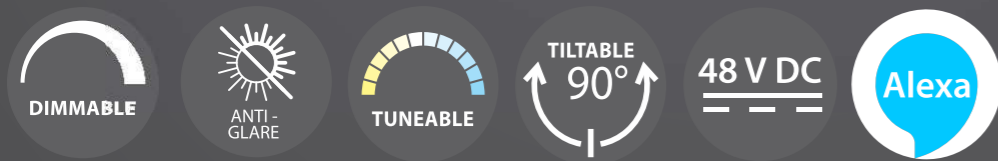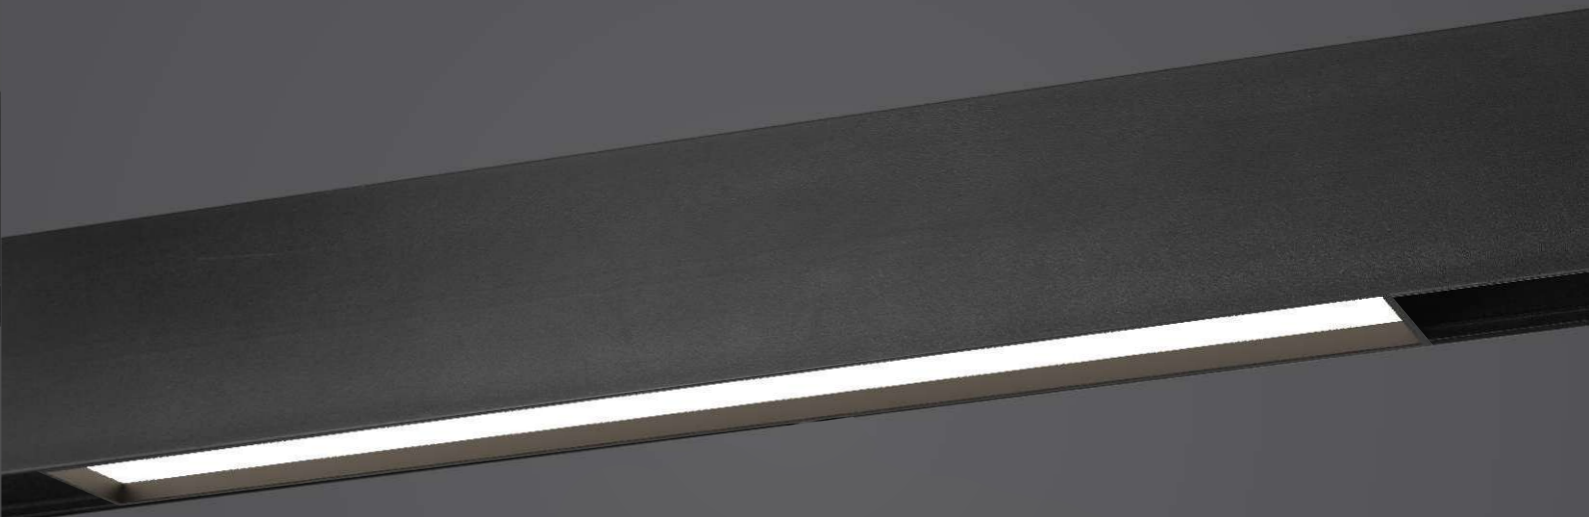


Wattage (W)		6W	12W
LUMEN OUTPUT	N 4000K	660	1320
	W 3000K	630	1260
SYSTEM EFFICIENCY	No. of LEDs	6	12
	Driver Rating	48V DC	48V DC
	UGR Rating	>9	>9
DIMENSIONS (in mm)	Size L	119	233
	W	22	22
	Height H	55	55
Recessed (Trimless)			
Track Size L	500 / 1000 / 2000		
W	67		
H	54		
Cutout Ø	30		
Surface mounted / Pendant / Recessed			
Track Size L	500 / 1000 / 2000		
W	27 (23mm Inner width)		
H	54		

SYSTEM SPEC	Housing	Aluminum	
	LED Make	Osram	
	Driver Brand	Meanwell (External)	
BEAM ANGLES	6W,12W,18W		
	30°		
COLOUR OPTIONS	Black		
	CRI	TEMP	IP RATING
>80	0-45°	IP-20	INPUT
			48VDC

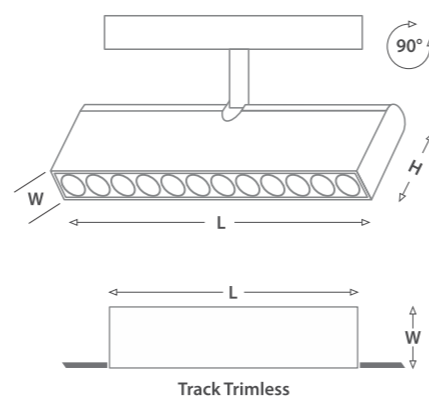

Wattage (W)		7W	15W	22W
LUMEN OUTPUT	N 4000K	700	1500	2200
	W 3000K	630	1350	2090
SYSTEM EFFICIENCY	Driver Rating	48V DC	48V DC	48V DC
	UGR Rating	>25	>25	>25
DIMENSIONS (in mm)	Size L	233	463	693
	W	22	22	22
	Height H	43	43	43
Recessed (Trimless)				
Track Size L	500 / 1000 / 2000			
W	67			
H	54			
Cutout Ø	30			
Surface mounted / Pendant / Recessed				
Track Size L	500 / 1000 / 2000			
W	27 (23mm Inner width)			
H	54			

SYSTEM SPEC	Housing	Aluminum	
	LED Make	Edison	
	Driver Brand	Meanwell (External)	
BEAM ANGLES	7W,15W,22W		
	100°		
COLOUR OPTIONS	Black		
	CRI	TEMP	IP RATING
>80	0-45°	IP-20	INPUT
			48VDC

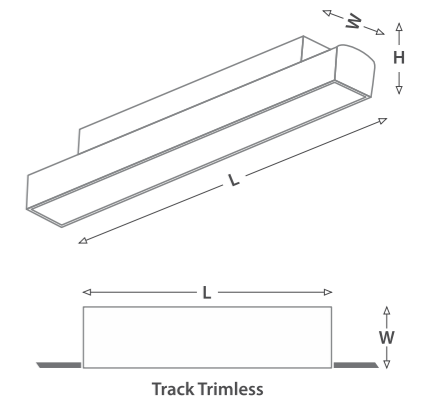

MARBUL PLUS



LFTL1124 H

MEGNETIC TRACK LIGHTS

MARBUL PLUS


LFTL1124 I

MEGNETIC TRACK LIGHTS

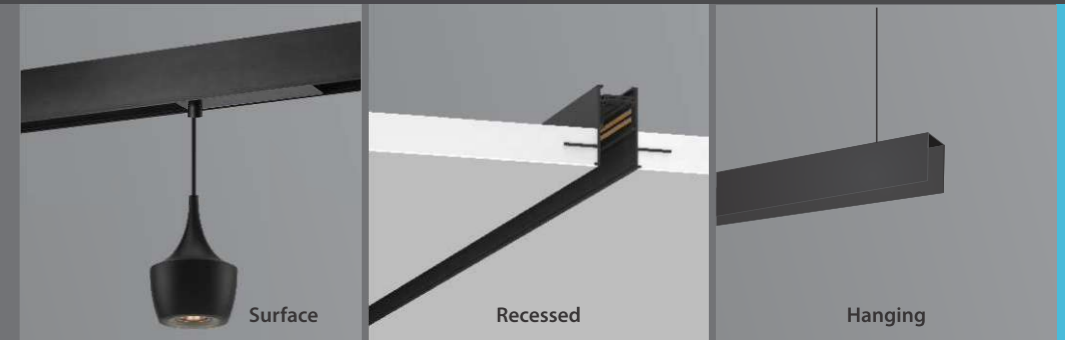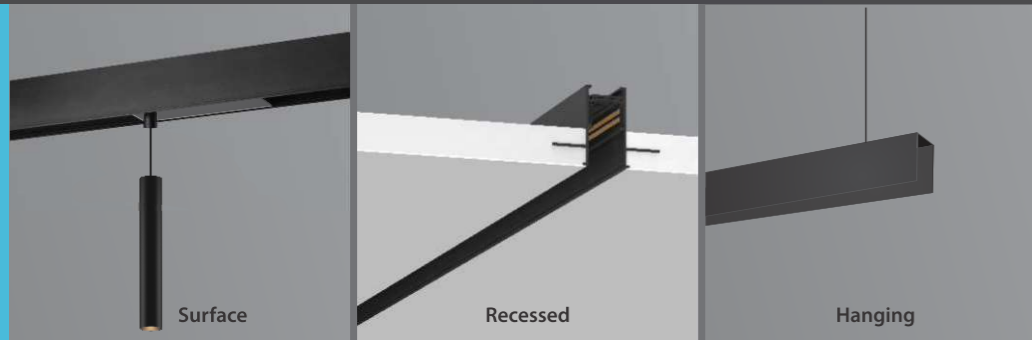


Wattage (W)		5W	12W
LUMEN OUTPUT	N 4000K	550	1320
	W 3000K	525	1260
SYSTEM EFFICIENCY	No. of LEDs	-	-
	Driver Rating	48V DC	48V DC
	UGR Rating	>14	>14
DIMENSIONS (in mm)	Diameter Ø	40	50
	Height H	300	300
	Adapter L	185	185
	Hanging wire L	1.5m	1.5m
Recessed (Trimless)			
Track Size	L	500 / 1000 / 2000	
	W	67	
	H	54	
	Ø	30	
Surface mounted / Pendant / Recessed			
Track Size	L	500 / 1000 / 2000	
	W	27 (23mm Inner width)	
	H	54	

SYSTEM SPEC	Housing	Aluminum	
	LED Make	Cree	
	Driver Brand	Meanwell (External)	
BEAM ANGLES	5W, 12W	36°	
	COLOUR OPTIONS	Black	
CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

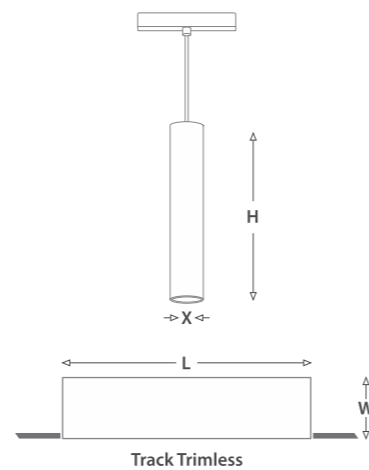

Wattage (W)		5W
LUMEN OUTPUT	N 4000K	550
	W 3000K	525
SYSTEM EFFICIENCY	No. of LEDs	-
	Driver Rating	48V DC
	UGR Rating	>9
DIMENSIONS (in mm)	Diameter Ø	79
	Height H	120
	Adapter L	185
	Hanging wire L	1.5m
Recessed (Trimless)		
Track Size	L	500 / 1000 / 2000
	W	67
	H	54
	Ø	30
Surface mounted / Pendant / Recessed		
Track Size	L	500 / 1000 / 2000
	W	27 (23mm Inner width)
	H	54

SYSTEM SPEC	Housing	Aluminum	
	LED Make	Cree	
	Driver Brand	Meanwell (External)	
BEAM ANGLES	5W	36°	
	COLOUR OPTIONS	Black	
CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

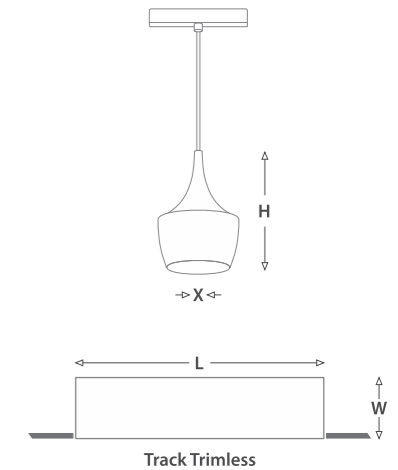

MARBUL PLUS

LFTL1124 J

MEGNETIC TRACK LIGHTS

MARBUL PLUS


LFTL1124 K

MEGNETIC TRACK LIGHTS



Wattage (W)		5W	10W
LUMEN OUTPUT	N 4000K	550	1100
	W 3000K	525	1050
SYSTEM EFFICIENCY		-	-
No. of LEDs		48V DC	48V DC
Driver Rating		>9	>9
UGR Rating			
DIMENSIONS (in mm)			
Diameter	Ø	50	50
Height	H	73	73
Adapter	L	185	185
Recessed (Trimless)			
Track Size	L	500 / 1000 / 2000	
	W	67	
	H	54	
	Ø	30	
Surface mounted / Pendant / Recessed			
Track Size	L	500 / 1000 / 2000	
	W	27 (23mm Inner width)	
	H	54	


SYSTEM SPEC	Housing	Aluminum	
	LED Make	Cree	
	Driver Brand	Meanwell (External)	
BEAM ANGLES			
	5W, 10W	36°	
COLOUR OPTIONS			
	Black		
CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

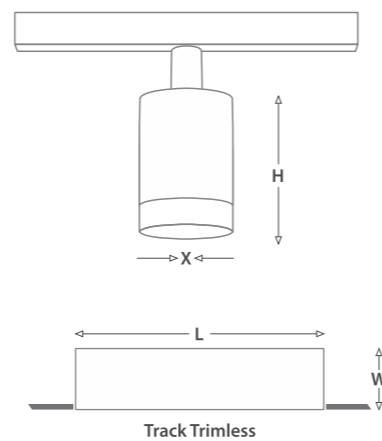

Track Trimless

Wattage (W)		6W	3W
LUMEN OUTPUT	N 4000K	600	300
	W 3000K	570	285
SYSTEM EFFICIENCY		-	-
No. of LEDs		48V DC	48V DC
Driver Rating		>25	>25
UGR Rating			
DIMENSIONS (in mm)			
Diameter	Ø	60	60
Height	H	108	108
Adapter	L	185	185
Recessed (Trimless)			
Track Size	L	500 / 1000 / 2000	
	W	67	
	H	54	
	Ø	30	
Surface mounted / Pendant / Recessed			
Track Size	L	500 / 1000 / 2000	
	W	27 (23mm Inner width)	
	H	54	

SYSTEM SPEC	Housing	Aluminum	
	LED Make	Cree	
	Driver Brand	Meanwell (External)	
BEAM ANGLES			
	6W, 3W	100°	
COLOUR OPTIONS			
	Black	White	
CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

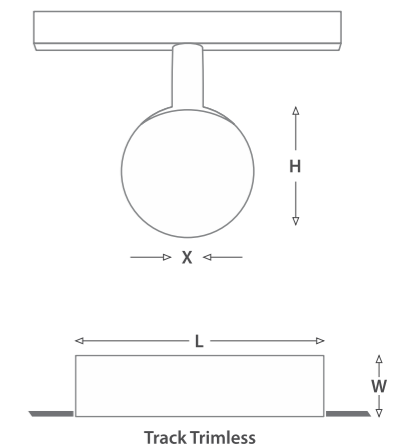

Track Trimless

MARBUL PLUS

LFTL1124 L



MEGNETIC TRACK LIGHTS



MARBUL PLUS


LFTL1124 M

MEGNETIC TRACK LIGHTS

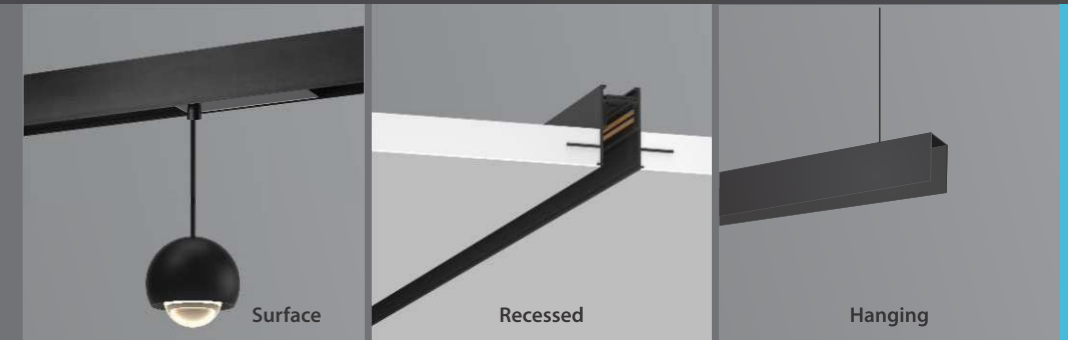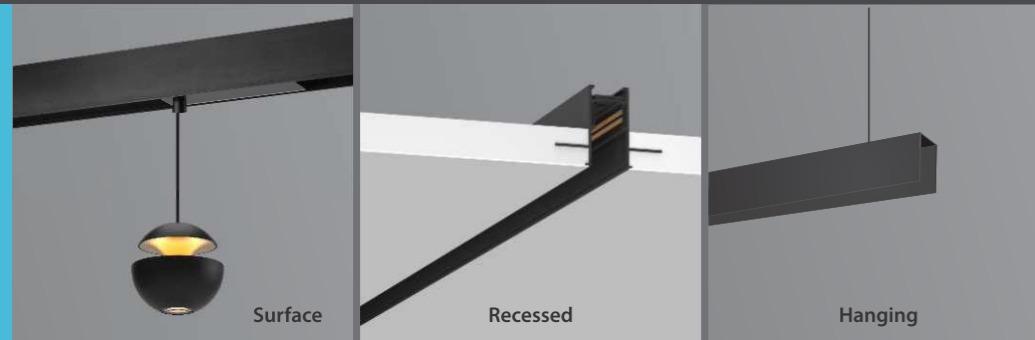


Wattage (W)	8W	
LUMEN OUTPUT	N 4000K	800
	W 3000K	760
SYSTEM EFFICIENCY	No. of LEDs	-
	Driver Rating	48V DC
	UGR Rating	>9 >9
DIMENSIONS (in mm)	Diameter Ø	100 100
	Height H	97 97
	Adapter L	185 185
	Hanging wire L	1.5m 1.5m
Recessed (Trimless)		
Track Size	L	500 / 1000 / 2000
	W	67
	H	54
	Ø	30
Surface mounted / Pendant / Recessed		
Track Size	L	500 / 1000 / 2000
	W	27 (23mm Inner width)
	H	54
	Ø	30

SYSTEM SPEC	Housing	Aluminum	
	LED Make	Cree	
	Driver Brand	Meanwell (External)	
BEAM ANGLES	8W	36°	
COLOUR OPTIONS	Black	Champagne Gold	
CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

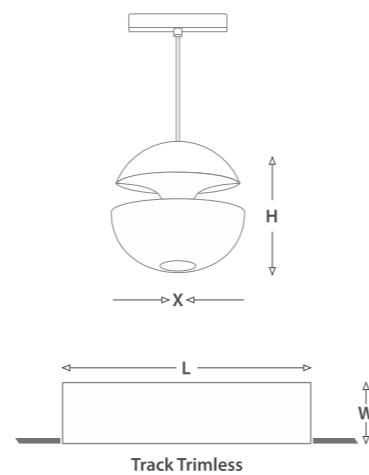

Wattage (W)	8W	
LUMEN OUTPUT	N 4000K	800
	W 3000K	760
SYSTEM EFFICIENCY	No. of LEDs	-
	Driver Rating	48V DC
	UGR Rating	>11
DIMENSIONS (in mm)	Diameter Ø	85
	Height H	76
	Adapter L	115
	Hanging wire L	1.5m
Recessed (Trimless)		
Track Size	L	500 / 1000 / 2000
	W	67
	H	54
	Ø	30
Surface mounted / Pendant / Recessed		
Track Size	L	500 / 1000 / 2000
	W	27 (23mm Inner width)
	H	54
	Ø	30

SYSTEM SPEC	Housing	Aluminum	
	LED Make	Cree	
	Driver Brand	Meanwell (External)	
BEAM ANGLES	8W	40°	
COLOUR OPTIONS	Black		
CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

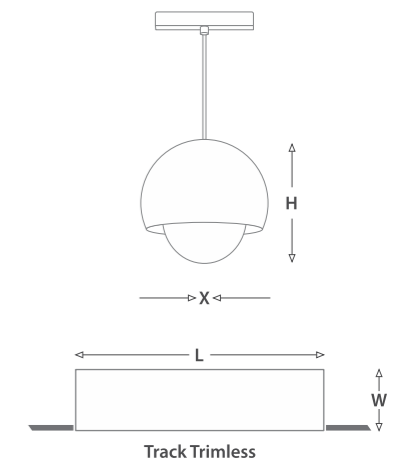

MARBUL

LFTL931 A/B/C/D/E/K

MAGNETIC TRACK LIGHTS



DIMMABLE






MARBUL

LFTL931 A/B/K/F/S/G

MAGNETIC TRACK LIGHTS



DIMMABLE

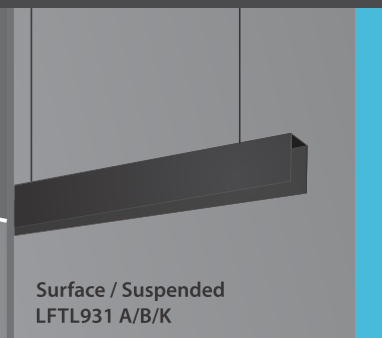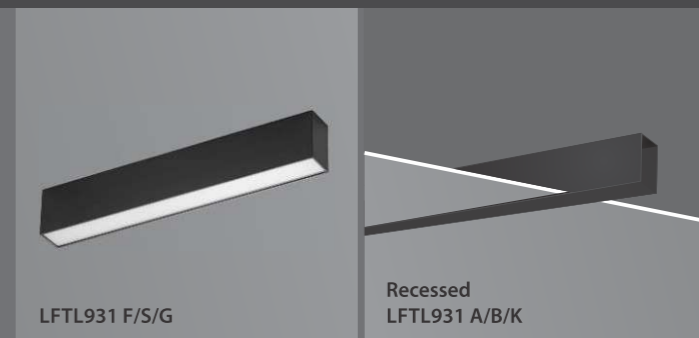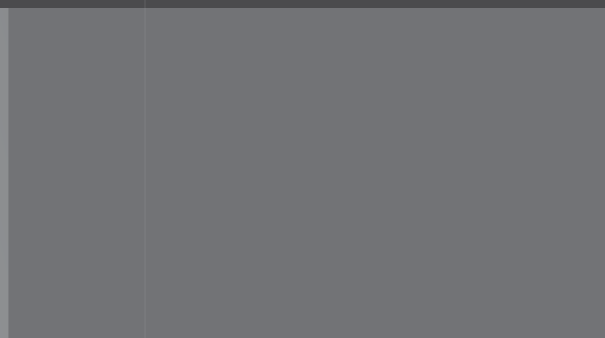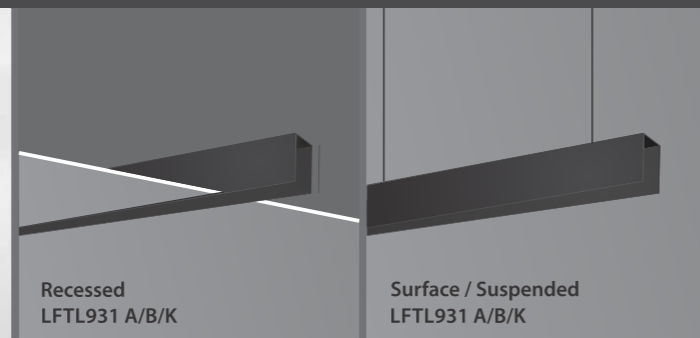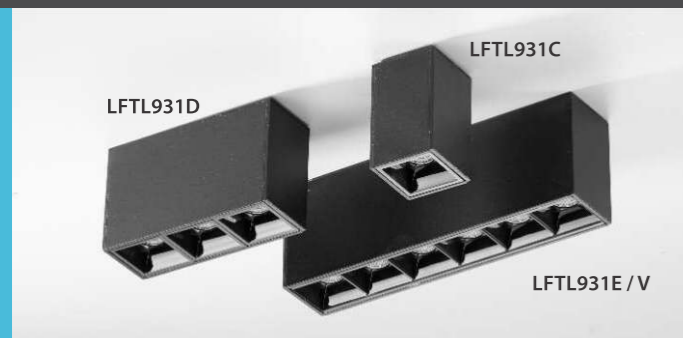


Wattage (W)		2W	6W	12W	18W
LUMEN OUTPUT	N 4000K	150	450	900	1350
	W 3000K	140	420	840	1260
SYSTEM EFFICIENCY	No. of LEDs	1	3	6	6
	THD (%)	-	-	-	-
	Driver Rating (For 1 Spot)	24V DC 90mA	24V DC 250mA	24V DC 500mA	24V DC 750mA
	Beam Angle	23°	23°	23°	23°
DIMENSIONS (in mm)	Size L	34	94	165	323
	W	34	34	34	34
	Height H	56	56	56	56
Track Size	L	500 / 1000 / 2000			
	W	40			

SYSTEM SPECS		Aluminum	
Housing	LED Make	Osram	Meanwell (External)
Driver Brand	Meanwell (External)		

BEAM ANGLES	
2W, 6W, 12W, 18W	23°

CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	24VDC

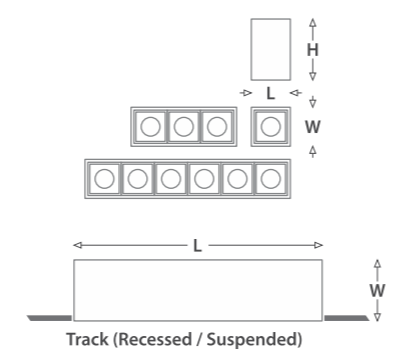


Wattage (W)		10W	20W	30W
LUMEN OUTPUT	N 4000K	750	1500	2250
	W 3000K	700	1400	2100
SYSTEM EFFICIENCY	No. of LEDs	24	48	72
	THD (%)	-	-	-
	Driver Rating (For 1 Spot)	24V DC 420mA	24V DC 850mA	24V DC 1250mA
	Beam Angle	120°	120°	120°
DIMENSIONS (in mm)	Size L	320	640	960
	W	34	34	34
	Height H	56	56	56
Track Size	L	500 / 1000 / 2000		
	W	40		

SYSTEM SPECS		Aluminum	
Housing	LED Make	Bridgelux	Meanwell (External)
Driver Brand	Meanwell (External)		

BEAM ANGLES	
10W, 20W, 30W	120°

CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	24VDC

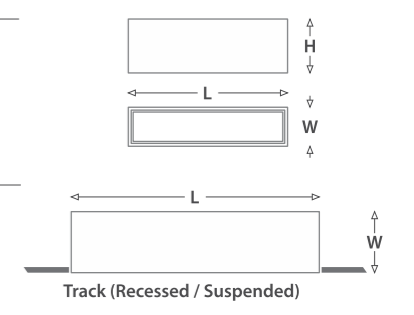

MARBUL

LFTL931 A/B/K/X

MAGNETIC TRACK LIGHTS




MARBUL

LFTL931 A/B/K/U


MAGNETIC TRACK LIGHTS



LFTL931 X




Recessed
LFTL931 A/B/K




Surface / Suspended
LFTL931 A/B/K



LFTL931 U



Recessed
LFTL931 A/B/K



Surface / Suspended
LFTL931 A/B/K

Wattage (W)		15W
LUMEN OUTPUT	N 4000K	1386
	W 3000K	1300
SYSTEM EFFICIENCY	No. of LEDs	1
	THD (%)	-
	Driver Rating (For 1 Spot)	24V DC 625mA
DIMENSIONS (in mm)	Diameter Ø	70
	Height H	112
Track Size	L	500 / 1000 / 2000
	W	40

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)
BEAM ANGLES	15W	
	36°	
Track (Recessed / Suspended)		
CRI	TEMP	IP RATING
>80	0-50°	IP-20
INPUT		
24VDC		

Wattage (W)		6W
LUMEN OUTPUT	N 4000K	450
	W 3000K	420
SYSTEM EFFICIENCY	No. of LEDs	1
	THD (%)	-
	Driver Rating (For 1 Spot)	24V DC 250mA
DIMENSIONS (in mm)	Diameter Ø	34
	Height H	54
Track Size	L	500 / 1000 / 2000
	W	40

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)
BEAM ANGLES	6W	
	25°	
Track (Recessed / Suspended)		
CRI	TEMP	IP RATING
>80	0-50°	IP-20
INPUT		
24VDC		

MARBUL

LFTL931J,W

MAGNETIC TRACK LIGHTS




MARBUL

LFTL931T


MAGNETIC TRACK LIGHTS (WALLWASHER)



LFTL931 J/W




Recessed
LFTL931 A/B/K

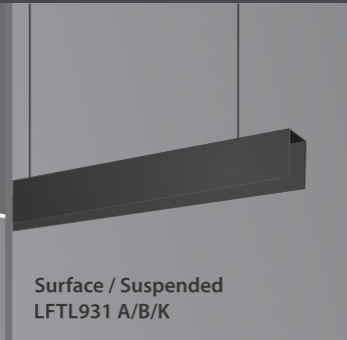

Surface / Suspended
LFTL931 A/B/K



LFTL931 T




Recessed
LFTL931 A/B/K



Surface / Suspended
LFTL931 A/B/K


Wattage (W)		12W	18W
LUMEN OUTPUT	N 4000K	900	1350
	W 3000K	840	1260
SYSTEM EFFICIENCY	No. of LEDs	6	6
	THD (%)	-	-
	Driver Rating (For 1 Spot)	24V DC 500mA	24V DC 750mA
DIMENSIONS (in mm)	Size L	165	323
	W	34	34
	Height H	182	182
Track Size L		500 / 1000 / 2000	
W		40	

SYSTEM SPECS	Housing	Aluminum	
	LED Make	Osram	
	Driver Brand	Meanwell (External)	
BEAM ANGLES	12W, 18W	23°	
CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	24VDC

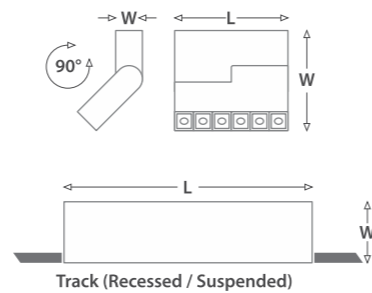

Wattage (W)		12W	
LUMEN OUTPUT	N 4000K	900	
	W 3000K	840	
SYSTEM EFFICIENCY	No. of LEDs	7	
	THD (%)	-	
	Driver Rating (For 1 Spot)	24V DC 500mA	
DIMENSIONS (in mm)	Size L	137	
	W	34	
	Height H	57	
Track Size L		500 / 1000 / 2000	
W		40	

SYSTEM SPECS	Housing	Aluminum	
	LED Make	Osram	
	Driver Brand	Meanwell (External)	
CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	24VDC

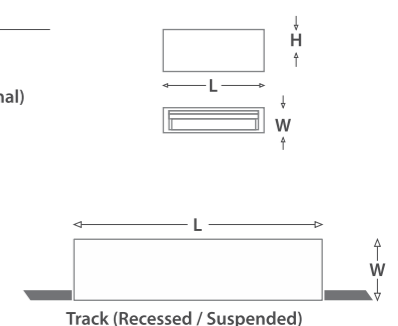

LAFIT




Track Lights



FUNNEL

SURFACE SPOT LIGHT

LFSS1079A,B

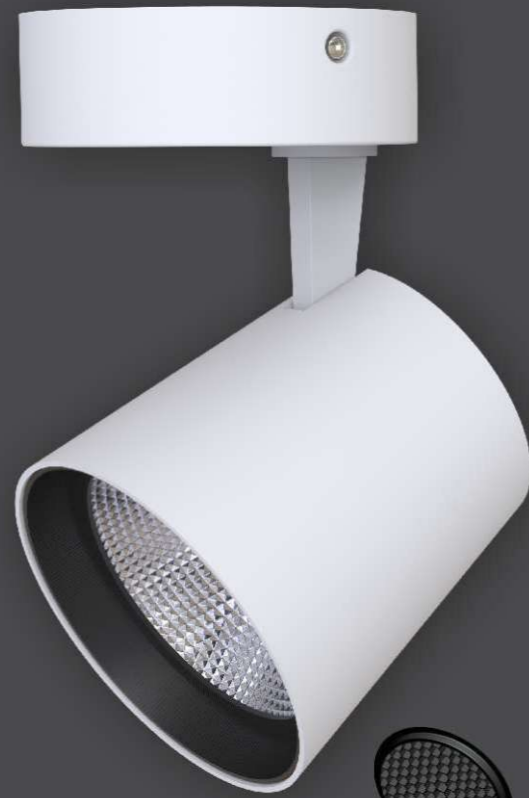

Honeycomb

Snoot

Barn door

Accessories



ANTI-GLARE





TILTABLE

FUNNEL

SPOT LIGHT

LFSL1079A,B



Honeycomb

Snoot

Barn door

Accessories



ANTI-GLARE



TILTABLE



LFTL1079A,B



LFSL1079A,B



LFTL1079A,B



LFSS1079A,B

Wattage (W)		12W	18W	30W
LUMEN OUTPUT	N 4000K	1336	1986	3128
	W 3000K	1262	1881	2924

SYSTEM EFFICIENCY		1	1	1
No. of LEDs				
THD (%)		20	20	15
Power Factor		>0.9	>0.9	>0.95
Driver Rating		36V DC 300mA	36V DC 400mA	36V DC 750mA


DIMENSIONS (in mm)		81	81	92
Lamp Diameter Ø				
Height H		81	81	92
Total Width W		110	110	137
Height H		150	150	165

SYSTEM SPECS		Aluminum
Housing		Cree
LED Make		BAG
Driver Brand		

BEAM ANGLES		15°	23°	30°	45°	60°

COLOUR OPTIONS		White	Black

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz



Wattage (W)		12W	18W	30W
LUMEN OUTPUT	N 4000K	1336	1986	3128
	W 3000K	1262	1881	2924

SYSTEM EFFICIENCY		1	1	1
No. of LEDs				
THD (%)		20	20	15
Power Factor		>0.9	>0.9	>0.95
Driver Rating		36V DC 300mA	36V DC 400mA	36V DC 750mA


DIMENSIONS (in mm)		81	81	92
Lamp Diameter Ø				
Height H		81	81	92
Total Width W		100	100	100
Height H		140	140	150
Cutout Ø		90	90	90

SYSTEM SPECS		Aluminum
Housing		Cree
LED Make		BAG
Driver Brand		

BEAM ANGLES		15°	23°	30°	45°	60°

COLOUR OPTIONS		White	Black

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

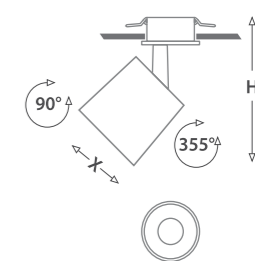

The
Frillo
Series



Architectural Lighting Solutions

J.R. ELECTRO CONTROLS

S-21, Basement, Kalpataru Apartments, 2129,
New Modikhana, Camp, Pune - 411 001.

Contact: 91- 7498576147 / 91-9823060520

Email: jrec52@hotmail.com

FOLLOW US ON

